




R7100C

Lepton⁷

30dBm 1-Port
RAIN RFID Reader Module

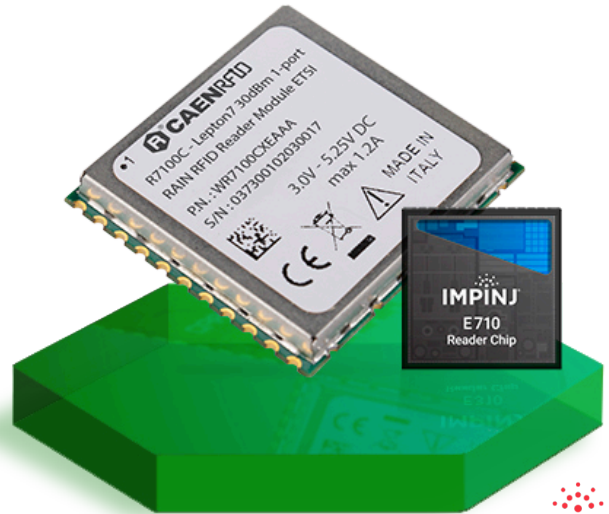

IMPINJ
CONNECTED

BENEFITS

Ultra compact size

High Sensitivity

Surface mount device (SMD)

IO/IO
Serial interface

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 30 dBm (1 W) output power
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves

Overview

The **Lepton⁷** (Model R7100C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 10 dBm to 30 dBm, the reader can detect tags at more than 5 m of distance (depending on antenna and tag dimensions).

Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E710** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device and the surface mount technology allow to embed the **Lepton⁷** inside the new small form factor industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton⁷** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁷** is pin-to-pin compatible with the **Impinj RS1000** and **RS500** modules making it a perfect replacement for these devices.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none"> • 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.1.1) • 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 10 dBm to 30 dBm (from 10 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none"> • -85 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output • -81 dBm - 1%PER, assuming 10 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	50 Ohm mono-static RF port on a single pin
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none"> • 4 channels (compliant to ETSI EN 302 208 v. 3.1.1) • 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none"> • UART Serial Port: <ul style="list-style-type: none"> • Baudrate from 9.600 to 921.600 kbit/s, default 115.200 kbit/s • Databits: 8 • Stopbit: 1 • Parity: none • Flow control: none • 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none"> • 4 I/O lines 3.3 V level • Iout = 8 mA max.
Power Supply	5 V DC ± 5%
Power Consumption	<ul style="list-style-type: none"> • 1.4 A @ 5 V - RF out = 30 dBm (TBC) • 10 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none"> • (W)29 x (L)32 x (H)3.8 mm³ • 1.14 x 1.26 x 0.15 inches³
Package Type	32 pin surface mount module (SMT compatible)
Operating Temperature	-20 °C to +70 °C
Weight	4.6 g

Ordering Options

WR7100CXAAAA	Lepton7 - 30dBm Reader Module		
WRHML37XEVBX	R1271, R3100, R7100 eval. board		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl

via Vetraia, 11 - 55049 Viareggio (LU) - Italy
 Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com